

Technical Data Sheet

Customer Part No.:

Inhere Part No.: S2835CPUET-034

Part Name: 2835 红光 LED

Spec Issue Date: 2024-06-20

Revision No.: A/0

Product Gradation : Commercial Product

To Customer:

We submit herewith the following information for your approval:

<input checked="" type="checkbox"/> Sample	<input type="checkbox"/> OQC Inspection Record	<input checked="" type="checkbox"/> LED Dimension
<input checked="" type="checkbox"/> Electrical Characteristics Curve	<input checked="" type="checkbox"/> Internal Circuit Diagram	
<input checked="" type="checkbox"/> Soldering recommendation		

Prepared by : Lily

Date : 2024-06-20

Checked by : Tom

Date : 2024-06-20

Approved by : Ares

Date : 2024-06-20

Customer Opinion

Approve and no objection
 Reject with the following reason:

东莞市银河光电有限公司

Dongguan Inhere Opto Co.,Ltd.

地址:东莞市莞城科技园 D 框

ADD: Building D, Guancheng Science & Technology Park, Dongguan

TEL: 0769-23320868 FAX: 0769-23320878

E-mail: bill@inhereopto.com

Http://www.inhereopto.com

Features

2.80mm×3.50mm LED, 0.70mm thickness

Low power consumption

Wide view angle

Package: 4000pcs/reel


RoHS Compliant

Applications


Ideal for back light and indicator

Various colors and lens types available

Package Outlines

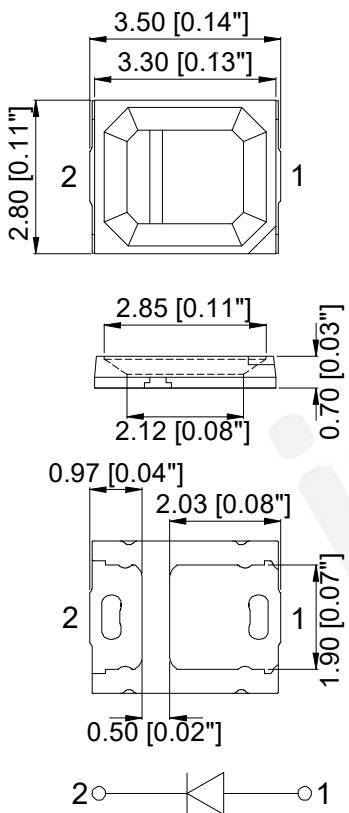

Recommend Pad Layout

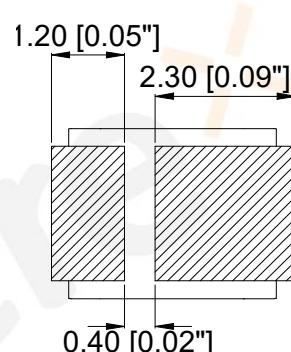

Part No.	Emitted color	Dice	Lens color
S2835CPUET-034	Red	AlGaInP	Water Clear

Notes:

All dimensions are in millimeters (inches).

Tolerances are ± 0.1 mm (0.004inch) unless otherwise noted.







Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Value	Unit
Forward current	If	60	mA
Peak pulsing current (1/10 duty f=1kHz)	Ifp	100	mA
Power dissipation	Pd	156	mW
ESD (HBM,R=100KΩ,C=100pF)	--	2	kV
Reverse voltage	Vr	5	V
Operating temperature	Top	-40 ~+100	°C
Storage temperature	Tstg	-40 ~+100	°C
Humidity sensitive level	MSL	3	--

Electro-Optical Characteristics (Ta=25°C)


Parameter	Test Condition	Symbol	Value			Unit
			Min.	Typ.	Max.	
Wavelength at peak emission	If=60mA	λp	650	--	660	nm
Spectral half bandwidth	If=60mA	△λ	--	16	--	nm
Forward voltage	If=60mA	Vf	1.8	--	2.6	V
Luminous intensity	If=60mA	Iv	1000	1250	--	mcd
Viewing angle	If=60mA	2θ1/2	--	120	--	Deg
Reverse current	Vr=5V	Ir	--	--	10	μA

Optical Characteristic Curves

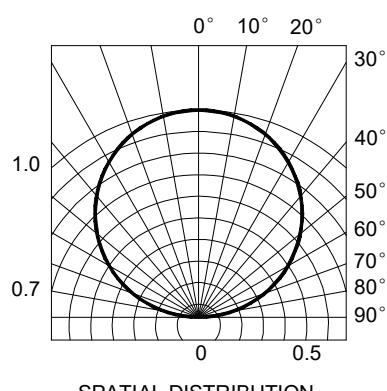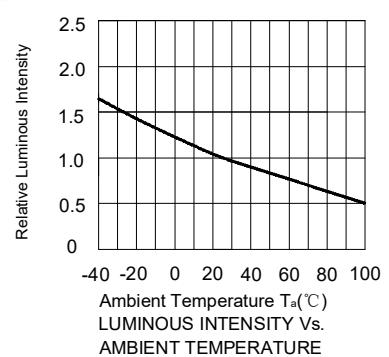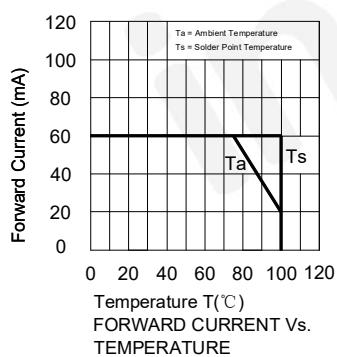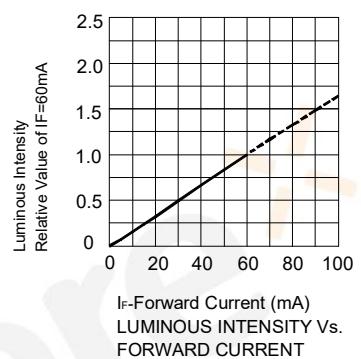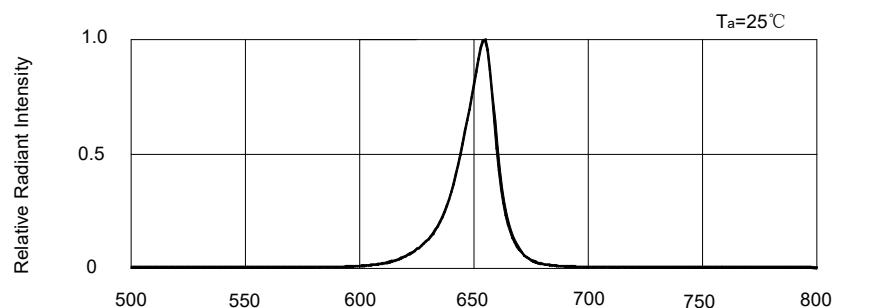

Reflow Profile

■ Reflow Temp/Time

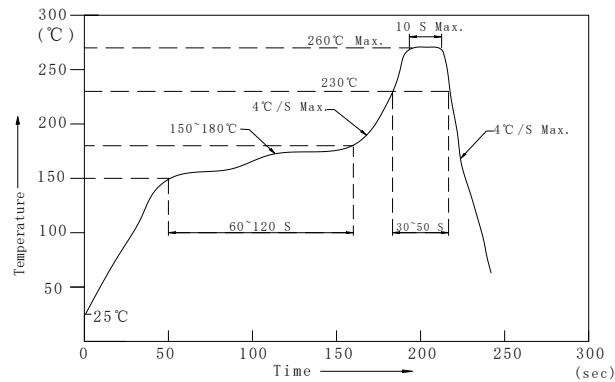

Notes:

1. We recommend the reflow temperature 245°C ($\pm 5^{\circ}\text{C}$). The maximum soldering temperature should be limited to 260°C .
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


■ Soldering iron

Basic spec is ≤ 5 sec when 320°C ($\pm 20^{\circ}\text{C}$). If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow -1\text{sec}$).

Power dissipation of iron should be smaller than 20W, and temperatures should be controllable. Surface temperature of the device should be under 350°C .

■ Rework


1. Customer must finish rework within 5 sec under 340°C .
2. The head of iron cannot touch copper foil.
3. Twin-head type is preferred.

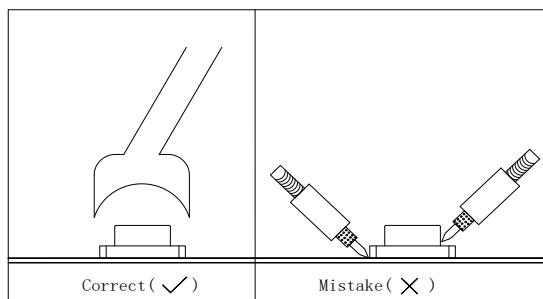

- Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow solder etc.

Test Circuit and Handling Precautions

■ Test circuit

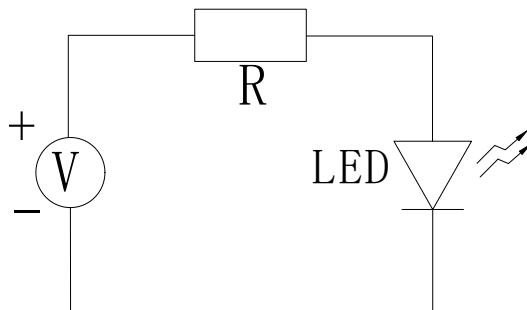

■ Handling precautions

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 It is recommended to store the products in the following conditions:

Humidity: 60% R.H. Max.

Temperature: 5°C~30°C

2.2 Shelf life in sealed bag: 12 month at <5°C~30°C and <30% R.H. after the package is opened, the products should be used within 168hrs or they should be keeping to stored at ≤ 20 R.H. with zip-lock sealed.

3. Baking

It is recommended to baking before soldering when the pack is unsealed after 168hrs.

The Condition is: 65 ± 5 °C/24hrs.

Test Items and Results of Reliability

Test Item	Test Conditions	Standard Test Method	Note	Number of Test
Reflow Soldering	Ta=260±5°C, Time=10±2S	JB/T 10845-2008	3times	0/22
Temperature Cycling	-40±5°C 30±1min ↑→(25°C/5±1min)↓ 100±5°C 30±1min	GB/T 2423.22-2012	100cycles	0/22
Thermal Shock	Ta=-40±5°C ~ 100±5°C, 15±1min dwell	GB/T 2423.22-2012	100cycles	0/22
High Humidity High Temp. Cycling	Ta=30±5°C ~ 65±5°C, 90±5%RH, 24hrs/1cycle	GB/T 2423.4-2008	10cycles	0/22
High Humidity High Temp. Storage Life	Ta=85±5°C, ψ(%)=85±5%RH	GB/T 2423.3-2006	1000hrs	0/22
High Temperature Storage Life	Ta=100±5°C, non-operating	GB/T 2423.2-2008	1000hrs	0/22
Low Temperature Storage Life	Ta=-40±5°C, non-operating	GB/T 2423.1-2008	1000hrs	0/22
Life Test	Ta=26±5°C, @60mA, ψ(%)=25%RH ~ 55%RH	--	1000hrs	0/22
High Humidity High Temp. Operating Life	Ta=85±5°C, ψ(%)=85%RH	GB/T 2423.3-2006	500hrs	0/22
Low Temperature Operating Life	Ta=-20±5°C	GB/T 2423.1-2008	1000hrs	0/22

Forward Voltage Rank Combination (IF=60mA)

Rank	Min.	Max.	Unit
12	1.8	2.0	
14	2.0	2.2	
16	2.2	2.4	
18	2.4	2.6	

Luminous Intensity Rank Combination (IF=60mA)

Rank	Min.	Max.	Unit
TU	1000	1500	mcd

Peak Wavelength Rank Combination (IF=60mA)


Rank	Min.	Max.	Unit
h	650	660	nm

Notes:


1. The tolerance of forward voltage is $\pm 0.05V$.
2. The tolerance of luminous intensity (I_v) is $\pm 15\%$.
3. The tolerance of peak wavelength is $\pm 1nm$.
4. This specification is preliminary.
5. This specification is a standard specification of our factory, can make in accordance with customer's special requirement.

2835 Series SMD Top LED Lamps Packaging Specifications


● Feeding Direction

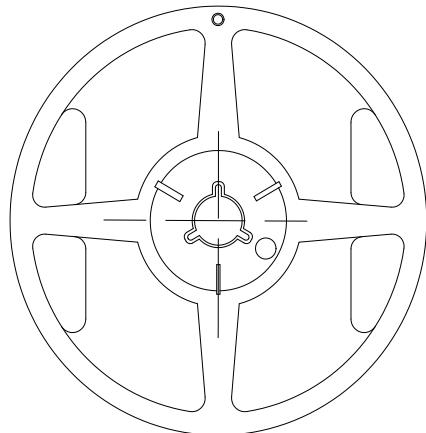

● Dimensions of Reel (Unit: mm)

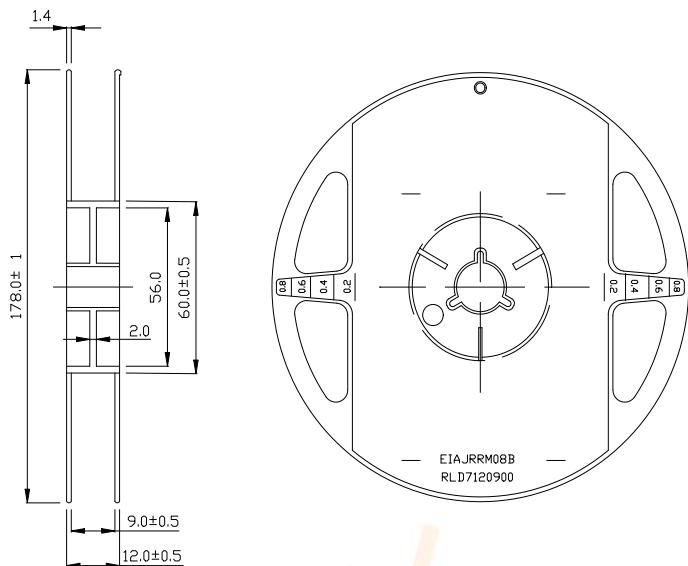

● Dimensions of Tape (Unit: mm)

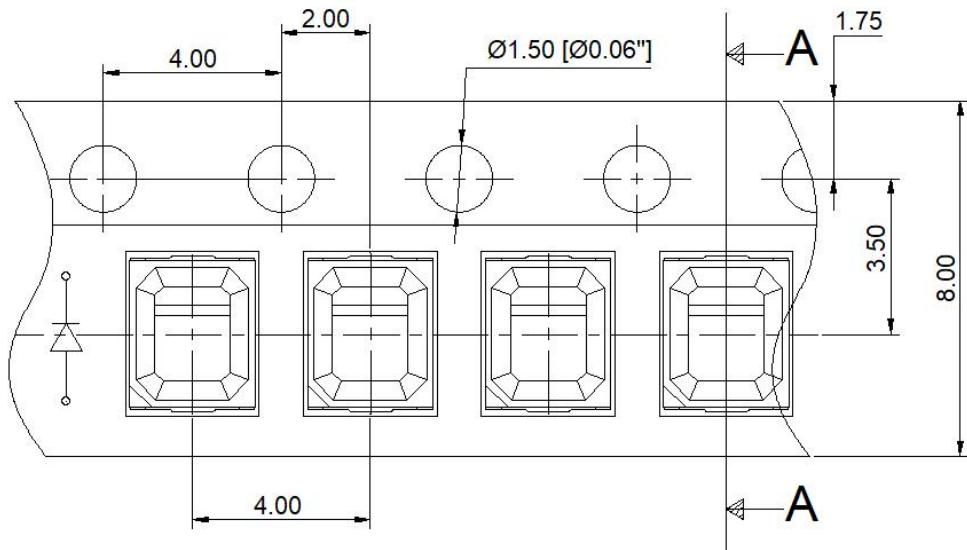


Notes:

1. Empty component pockets are sealed with top cover tape.
2. The maximum number of missing lamps is two.
3. The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications.
4. 4,000pcs/Reel.

2835 Series SMD Top LED Lamps Packaging Specifications

● Packaging specifications

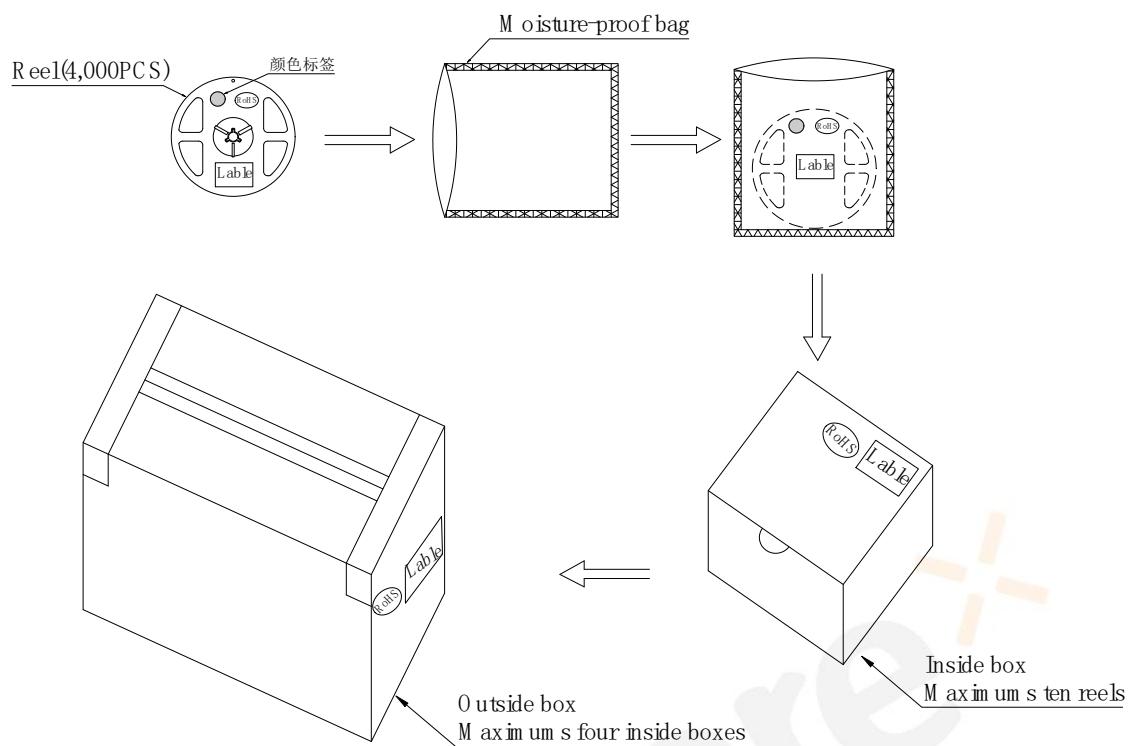

Notes:

Reeled products (numbers of products are 4,000pcs) packed in a seal off moisture-proof bag along with a desiccant one by one, ten moisture-proof bag of maximums (total maximum number of products are 40,000pcs) packed in an inside box (about size: 240x 230x 130mm) and four inside boxes of maximums are put in the outside box (about size: 545mm x 260mm x 250mm) Together with buffer material, and it is packed. (Part No., Lot No., quantity should appear on the label on the moisture-proof bag, part No. And quantity should appear on the label on the cardboard box.) The number of the loading steps of outside box (cardboard box) has it to three steps.