# **Specifications for Approval**

Customer Part No.:

	Inhere Part No.:	LWR50393-R01					
	Part Name: 5mm 圆头有边水清透明红白双色共阳 LED						
	Spec Issue Date:	2018-07-21					
	Revision No.: A						
========	:========		=======================================				
To Customer:	;						
■ Sample ■ Electrica	To Customer:  We submit herewith the following information for your approval:  ■ Sample □ OQC Inspection Record ■ LED Dimension ■ Electrical Characteristics Curve ■ Internal Circuit Diagram ■ Soldering recommendation						
Prepared by Date: 2018-0		Checked by: Tom Date: 2018-07-21	Approved by: Wangxiaojun Date: 2018-07-21				
<del></del>	Opinion  and no objection  th the following reas	on:					



东莞市银河光电有限公司
DongGuan Inhere Opto CO.,LTD.
地址:东莞市莞城科技园 D 幢
ADD:Guancheng Science & Technology Park, DongGuan TEL: 0769-23320868 FAX: 0769-23320878
E-mail: bill@inhereopto.com

Http://www.inhereopto.com

# **SPECIFICATIONS**

## **Features**

- High speed response.
- High reliability and long life.
- Low power consumption.
- Available in red, orange, yellow, yellow-green, green, blue, white, pink\*
- Suitable for pulse operation.
- RoHS compliant.


# Description

- The Red source color devices are made with AlGaInP on GaAs Light Emitting Diode.
- The White source color devices are made with InGaN/GaN on Al<sub>2</sub>O<sub>3</sub> Light Emitting Diode.

# **Applications**

- Consumer electronics
- Display boards
- Indicators

## **Dimensions**

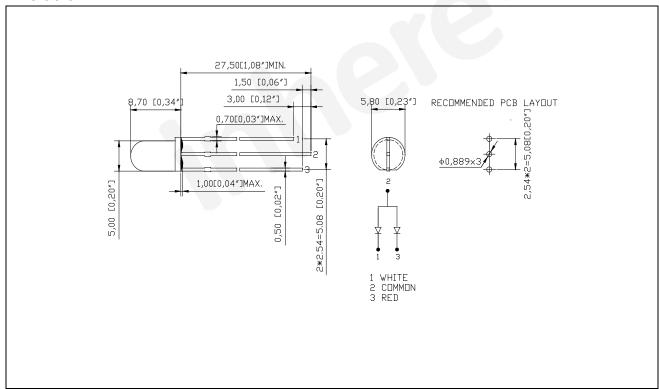

## Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25 (0.01") unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

Part No.: LWR50393-R01 Rev.: A
Prepared by: Lily Checked by: Tom

Date: 2018-07-21 Approved by: Wangxiaojun

# **Selection Guide**

Part No.	Dice	Emitting Color	Lens Type	I <sub>V</sub> (mcd)	Viewing Angle(°)		
				Min.	Тур.	$2\theta_{\frac{1}{2}}$	
LWR50393-R01	AlGaInP	Red	Water Class	5000	8000	30	
	InGaN/GaN	White	Water Clear	8000	12000	20	

Note:

 $1.\, heta_{rac{1}{2}}$  is the angle from optical centerline where the luminous intensity is  $\,rac{1}{2}\,$  the optical centerline value.

2. The tolerance of luminous intensity (Iv )is  $\pm 15\,\%$  .

Electrical / Optical Characteristics (at  $T_a = 25$ °C)

	Symbol	Color	Value			11-25		
Parameter			Min.	Тур.	Max.	Unit	Test Condition	
Forward Voltage	$V_{\rm F}$	Red White	1.8 2.8		2.5 3.5	V	I <sub>F</sub> = 20mA	
Dominant Wavelength	入 <sub>D</sub>	Red	620		630	nm	I <sub>F</sub> = 20mA	
Color Temperature	ССТ	White	7500	11500		К	I <sub>F</sub> = 20mA	
Reverse Current	$I_R$	Red White		-	10	μА	V <sub>R</sub> = 5V	

## Note:

- 1. The tolerance of forward voltage is  $\pm 0.05 V$
- 2. The tolerance of CCT is  $\pm\,400$  K.
- 3. This specification is a standard specification of our factory, can make in accordance with customer's special requirement.

Absolute Maximum Ratings (at  $T_a = 25$ °C)

Downster	Sumbal	Value		Unit		
Parameter	Symbol	R	w	Unit		
Power Dissipation	Power Dissipation P <sub>D</sub> 75 105		mW			
Pulse Forward Current(Duty 1/10 @ 1 kHz)	$I_{\mathrm{FP}}$	100		mA		
Forward Current	Forward Current I <sub>F</sub> 30		mA DC			
Reverse Voltage	$V_R$	5		V DC		
Operating Temperature	$T_{ m opr}$	-40 ~ +85		°C		
Storage Temperature	$T_{ m stg}$	-40 ~ +85		-40 ~ +85 °C		°C
Soldering Temperature	$T_{ m sld}$	260°C for 5 sec		for 5 sec		

Part No.: LWR50393-R01 Prepared by: Lily Rev.: A Checked by: Tom Date: 2018-07-21 Approved by: Wangxiaojun


# **Reliability Testing Conditions**

NO	Test Item	Test Conditions	Duration	Sample	Ac/Re
1	Temperature Cycle	-40°C±5°C∼25°C±5°C∼100°C±5°C∼25°C±5°C 30min 5min 30min 5min	100cycles	22	0/1
2	High Temp. Storage	Ta=100°C ±5°C	1000hours	22	0/1
3	Temp.& Humidity Test	Ta=85℃±5℃ RH=85%±5%	1000hours	22	0/1
4	Low Temp. Storage	Ta=-40 °C ±5 °C	1000hours	22	0/1
5	Operating Life Test	Ta=25±5℃ DC IF=20mA	1000hours	22	0/1
6	Solder Heat	Tsol=260±5℃,5s	1times	22	0/1
7	Thermal Shock	-40±5°C → 100±5°C 15min 15min	100cycles	22	0/1


Part No.: LWR50393-R01 Prepared by: Lily

Rev.: A Checked by: Tom Date: 2018-07-21 Approved by: Wangxiaojun


# **Optical Characteristic Curves (Red)**

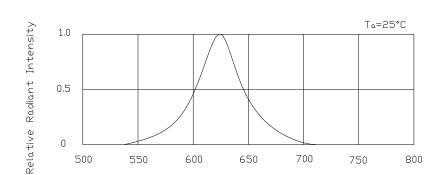


wavelength (nm) RELATIVE INTENSITY Vs.WAVELENGTH




Forward Voltage (V) FORWARD CURRENT Vs. FORWARD VOLTAGE






2.5

Should be seen a seen as a seen a seen



SPATIAL DISTRIBUTION

# **Optical Characteristic Curves (White)**

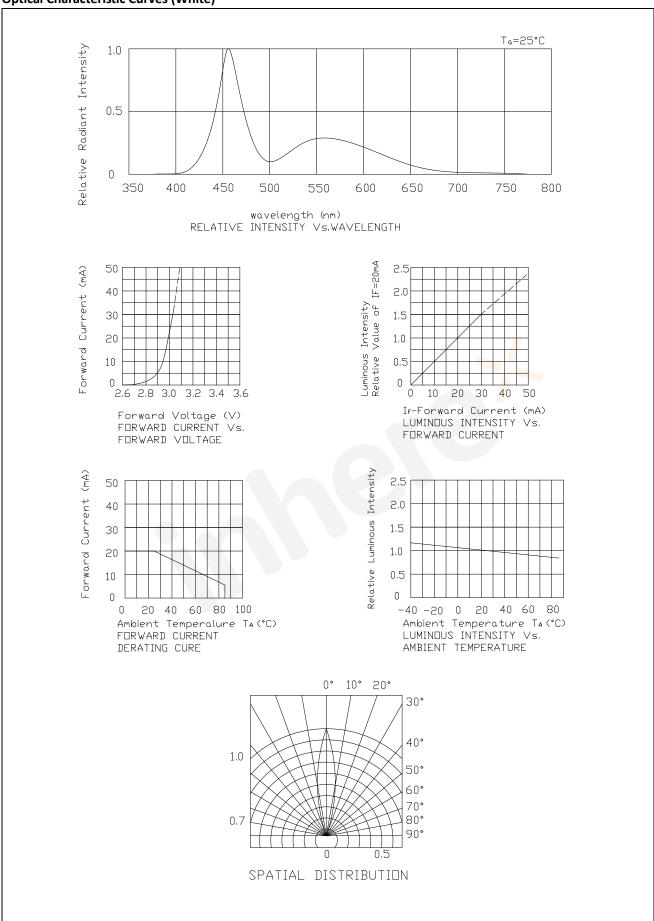

## **Precautions in Use**

## 1. Soldering Condition

- a. When soldering, leave the minimum clearance between the bottom of the resin and the soldering point.
- b. Do not solder closer than 3mm from the base of the epoxy bulb.
- c. Maximum allowance soldering conditions are:
  - Dip Soldering: 260°C max., 5 sec Max., 1 time.
  - Soldering iron: 350°C max., 5 sec Max., 1 time
- d. Contact between molten solder and the resin shall be avoided.
- e. During soldering, do not put any stress on the lead frame, particularly when heated.

# 2. Lead frame Forming and Use

- a. When forming leads, the leads shall be bent at a point at least 3mm from the base of epoxy bulb. Do not use the base of the lead frame as a fulcrum during lead forming.
- b. Lead forming shall be done before soldering.
- c. Do not apply any bending stress to the base of the lead. The stress to the base may damage the LED's characteristics or it may break the LED.
- d. When mounting the LED onto a printed circuit board, the holes on the PCB shall be exactly aligned with the leads of the LED. If the LED is mounted with stress at the leads, it may cause deterioration of the epoxy resin and this may degrade the LED.
- e. Avoid condition which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operation. It is recommended that the LED be used as soon as possible.
- f. Avoid rapid transition in ambient temperature, especially in high humidity environment.

## 3. Static Electricity

- a. The product is sensitive to static electricity charge, and user is required to handle it with care. Particularly, if a current and/or voltage which exceed the Absolute Maximum Rating of the Product is applied, the overflow in energy may cause damage to, or possibly result in electrical destruction of, the LED. The customer is requested to take adequate countermeasure against static electricity charge and surge when handling it.
- b. Proper grounding, use of conductive mat, conductive working uniform and shoes, and conductive containers are effective against static electricity and surge.
- c. Ground low-resistance area where the product contacts, such as metal surface of the work platform, with a conductive mat (surface resistance  $10^6 \sim 10^9$  ohm).
- d. A tip of soldering iron is requested to be grounded. An ionizer shall also be installed where risk of static generation is high.

## Notes:

- 1. The above specification and dimensions may be modified for product improvement. Inhere reserves the right to change the specification without notice.
- When using this product, please observe the Absolute Maximum Ratings and the instructions in the specification sheets. Inhere assumes no responsibility for any damage resulting from use of the product that does not comply with the instructions.

Part No.: LWR50393-R01 Rev.: A
Prepared by: Lily Checked by: Tom